ITEM NO. _____

WM-TR WATER MAX
HOT WATER DELIVERY SYSTEM

Features

- Water Max has been designed to hold new custom five gallon easy-connect hot water dispensing tanks.
- Tank design includes liquid level control probe mounted in insulated tank.
- Dispensing tank automatically refills with hot water at set temperature when rapid flow faucet opens, eliminating temperature recovery delays.
- All stainless steel hot water dispensing tank designed for easy cleaning and deliming.
- New tank design increases hot water flow rate, dispensing a 96 oz. container in less than 25 seconds.
- Preset water temperature is maintained in tank by an internally insulated low watt heating system.
- Advanced technology designed to save energy.

Accessories / Options

Cordset, NEMA 6-50P, 22714

MODEL WM-TR
HOT WATER DELIVERY SYSTEM
WITH TANK

LISTED E6070 STD.4 LISTED E6070

DIMENSIONS: INCH (MM)

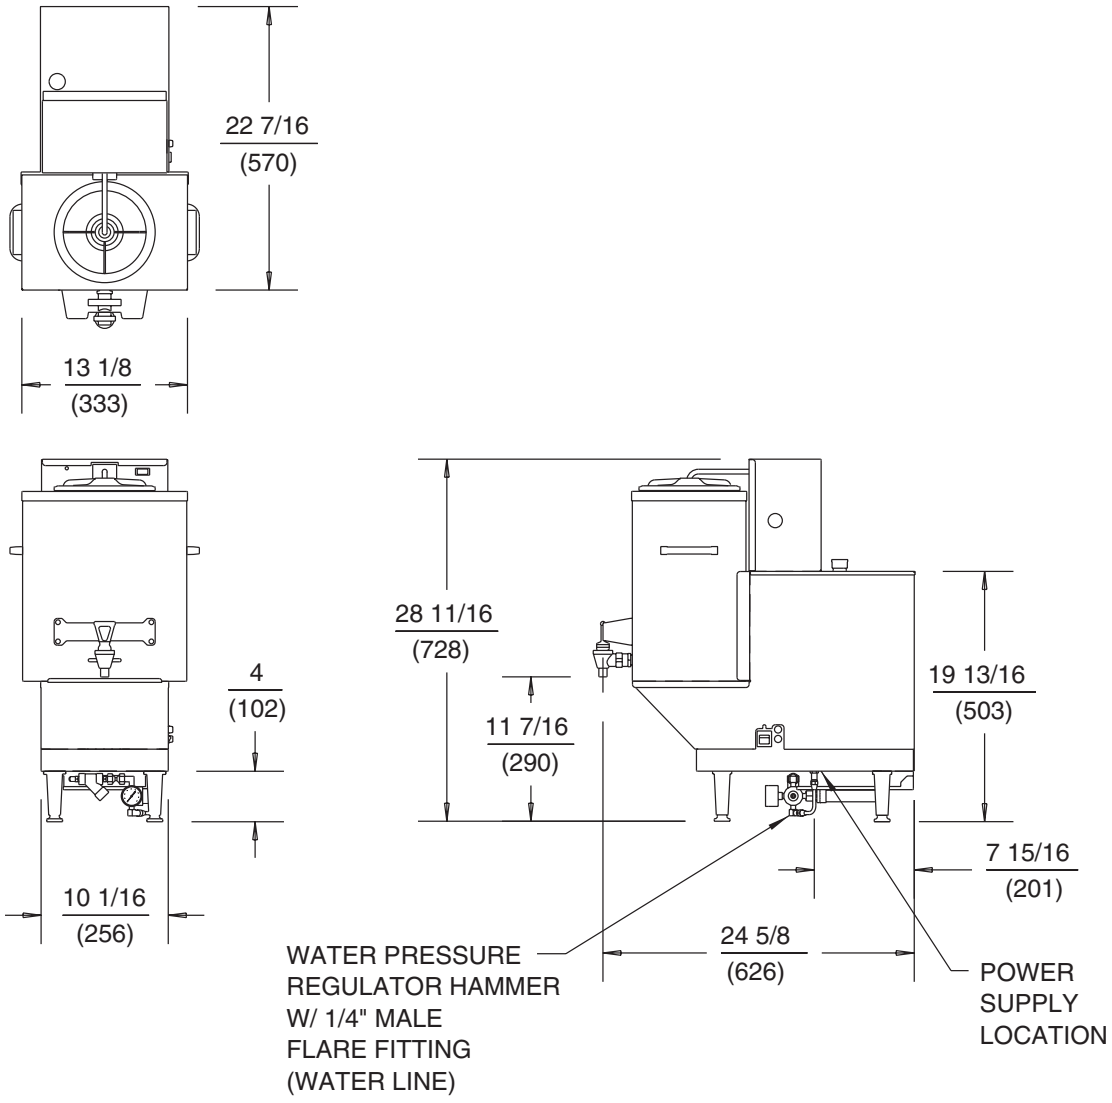

WM-TR ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	AMPS	PHASE	POWER SUPPLY CORD
WM-TR	208/240	35.0	SINGLE	NONE

NOTE: Specifications are subject to change without notice.

WELLS MANUFACTURING COMPANY
2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A. • USA PHONE: (775) 345-0444 • FAX: (775) 345-0569
FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142 • www.wellsbloomfield.com
A SPECIALTY EQUIPMENT COMPANY • 2000 WELLS MANUFACTURING • PRINTED IN THE U.S.A. • 10/00 • REV(-) • PART NO. 75012